



TEST REPORT

ULTRAFLEX SYSTEMS, INC.
385 Franklin Avenue
Rockaway, NJ. 07866
Attn. John Schleicher, Jr.

REPORT NO. 24815

February 8, 1999

PAGE 15 OF 40

IDENTIFICATION SUBMITTED BY CLIENT

1 SAMPLE: **ULTRALON IV**

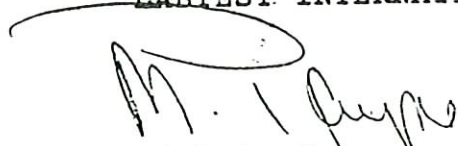
FIRE RESISTANCE - STATE OF CALIFORNIA (NATURALS/SYNTHETICS)
(Small Scale Test)

EVALUATION OF TEST RESULTS

This fabric sample submitted DOES meet the requirements when tested in accordance with procedures outlined in Specifications for Flame-Retardant Chemicals, Fabrics and Application Concerns, California Administrative Code Title 19 (Interior Chemicals).

Test
Reference
24815
JG

Tested By
ITS
Intertek
Testing Services

LABTEST INTERNATIONAL, INC.

Michele Payne
Technical Supervisor

-continued-



TEST REPORT

REPORT NO. 24815

February 8, 1999

PAGE 16 OF 40

IDENTIFICATION SUBMITTED BY CLIENT

1 SAMPLE: **ULTRALON IV**

TEST RESULTS

STATE OF SAMPLE: AS RECEIVED

<u>AFTERFLAME (SECONDS)</u>		<u>CHAR LENGTH (INCHES)</u>	
<u>WARP</u>	<u>FILLING</u>	<u>WARP</u>	<u>FILLING</u>
2.0	1.0	4.8	3.6
4.0	1.0	5.2	4.3
2.0	3.0	4.8	4.9
4.0	1.0	4.5	4.8
<u>0.0</u>	<u>0.0</u>	<u>4.7</u>	<u>4.5</u>
Average: 3.0	1.5	4.8	4.4

OBSERVATIONS

Afterglow: NO

Localize Burning: YES

REQUIREMENTS

- Afterflame shall not exceed 4.0 seconds for average.
- Char length shall not exceed 6.0 inches for any one specimen.

IF YOU NEED ASSISTANCE IN INTERPRETING THESE TESTS RESULTS
OR IF YOU HAVE ANY QUESTIONS, PLEASE FEEL FREE TO CALL:
HEATHER ROBERTSON OR EDUARDO PALOMO